



GENERAL

Dimension(L*W*H)	10110×2550×3800 mm
Total Weight	25000 kg
Max Reach Vertical	37.3 m
Max Reach Horizontal	32.9 m
Max Reach Depth	25.3 m
Unfolded Reach	7.5 m
Outrigger Span: Front/Rear/Front-Rear	6135×7706×7271 mm
Fuel Tank Capacity	500 L
Water Tank Capacity	350 L
Hopper Volume	0.6 m ³
Chassis Brand	HOWO
Remote Control	HBC
Hydraulic System	Open

BOOM

Number of Booms	5 Sections
Folding Type	RZ Fold
Boom Rotation Angle	90°/180°/180°/ 235°/190°
1st Section	7700 mm
2nd Section	6200 mm
3rd Section	5950 mm
4th Section	6780 mm
5th Section	6820 mm
Turret Rotation Angle	± 240°
Boom Multiway Valve Type	Manual/electro-hydraulic control (6-way)
Boom Multiway Valve Brand	Radk-Tech

PUMP


Theoretical Output	105/60 m ³ /h
Theoretical Pumping Pressure	7.5/14 MPa
Theoretical Pumping Times	15/27 times/min
Main Oil Pump Brand	Rexroth
Main Oil Pump Displacement	190 ml/r
Main Oil Pump Theoretical Pressure	32 MPa
Delivery Cylinder External Diameter	230 mm
Delivery Cylinder Stroke Length	1600 mm
Main Cylinder Outer Diameter	150 mm
Main Cylinder Rod Diameter	100 mm
Concrete Pipe Diameter	125 mm

DIMENSIONS




DIAGRAMS

OUTRIGGER EXTENSION

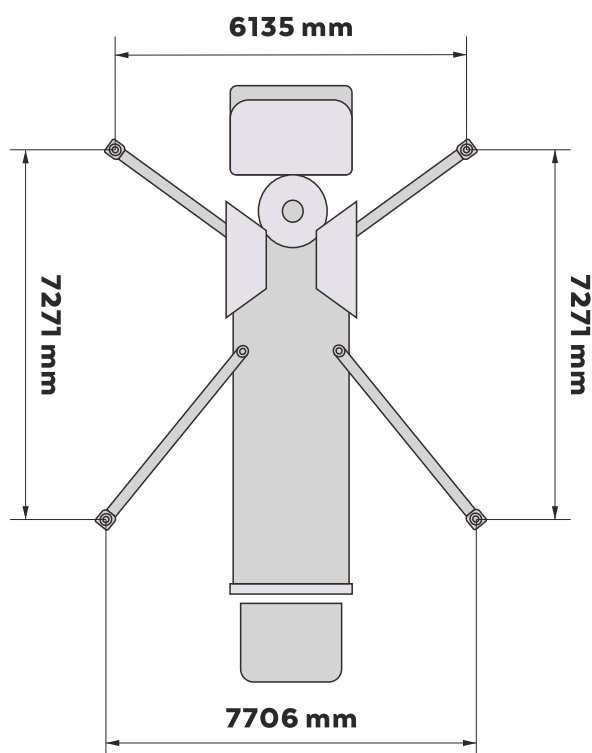

BOOM PUMP REACH

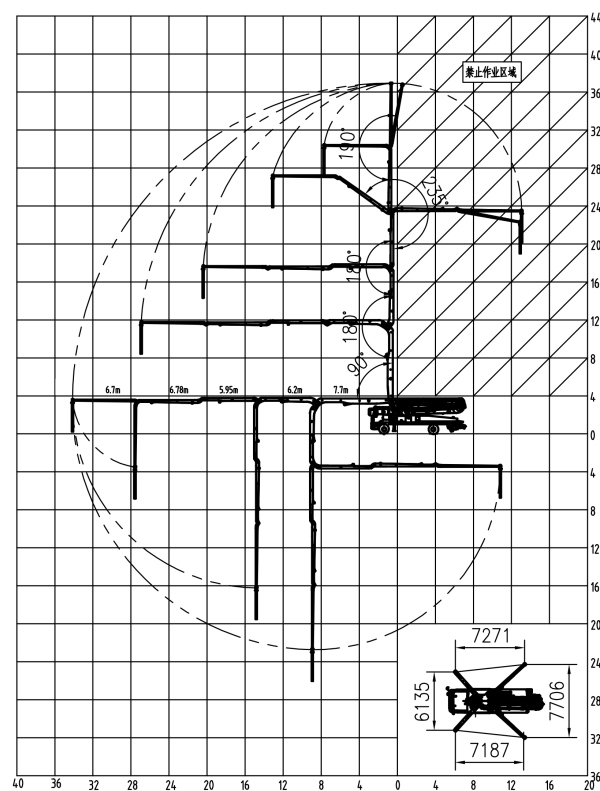

WWW.XANJER.COM

High-Tech Industrial Zone, Guanxi Town,
Changde, Hunan, China 415106
Service Hotline
Tel: 0086-4006969099
Mail: info@xanjer.com

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.