



GENERAL

Dimension(L*W*H)	9412×2500×3728 mm
Total Weight	17870 kg
Max Reach Vertical	26.2 m
Max Reach Horizontal	21.9 m
Max Reach Depth	15.2 m
Unfolded Reach	5.9 m
Outrigger Span: Front/Rear/Front-Rear	5200×3456×5944 mm
Fuel Tank Capacity	500 L
Water Tank Capacity	600 L
Hopper Volume	0.6 m ³
Chassis Brand	Multiple Choices
Remote Control	HBC
Hydraulic System	Open


BOOM

Number of Booms	4 Sections
Folding Type	Z Fold
Boom Rotation Angle	90°/180°/255°/ 240°
1st Section	7005 mm
2nd Section	5000 mm
3rd Section	5000 mm
4th Section	5400 mm
Turret Rotation Angle	± 360°
Boom Multiway Valve Type	Manual/electro-hydraulic control (6-way)
Boom Multiway Valve Brand	Radk-Tech
Support Table	Independent Fuel Tank

PUMP


Theoretical Output	117 m ³ /h
Theoretical Pumping Pressure	6.8 MPa
Theoretical Pumping Times	28 times/min
Main Oil Pump Brand	Rexroth
Main Oil Pump Displacement	190 ml/r
Main Oil Pump Theoretical Pressure	32 MPa
Delivery Cylinder External Diameter	230 mm
Delivery Cylinder Stroke Length	1600 mm
Main Cylinder Outer Diameter	140 mm
Main Cylinder Rod Diameter	90 mm
Concrete Pipe Diameter	125 mm

DIMENSIONS

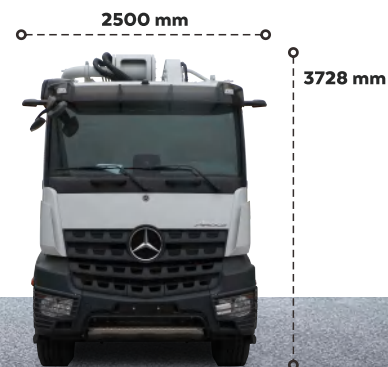


DIAGRAMS

OUTRIGGER EXTENSION

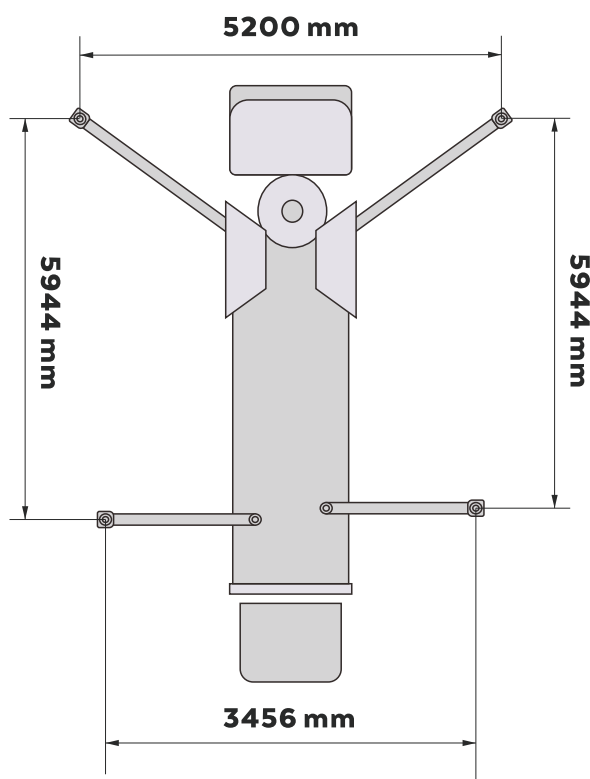

BOOM PUMP REACH

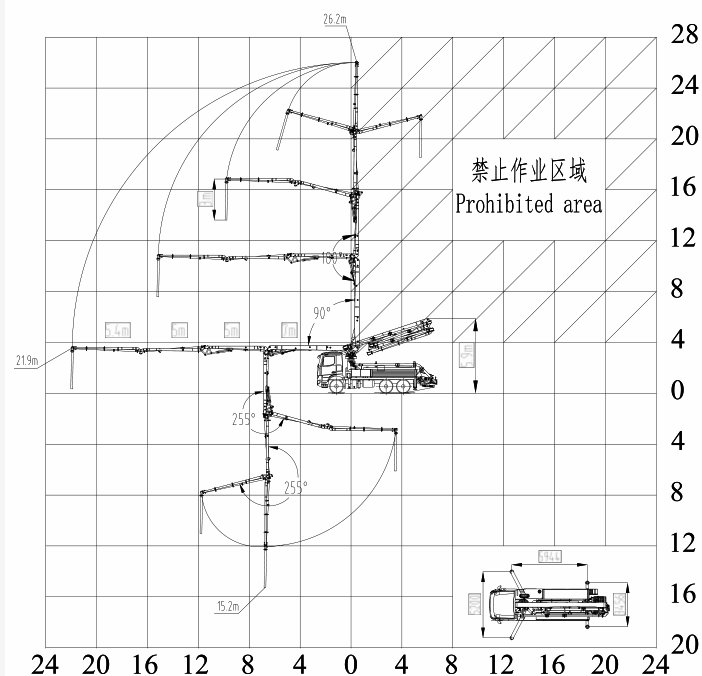

WWW.XANJER.COM

High-Tech Industrial Zone, Guanxi Town,
Changde, Hunan, China 415106
Service Hotline
Tel: 0086-4006969099
Mail: info@xanjer.com

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.